



Interspan Series FN 35/15

**For floors - surface
fixing**


Movement Capacity:
up to $\pm 5\text{mm}$
($\pm 7\text{mm}$ if fitted as
FN41/15)

Features

Insert can be supplied in a
continuous length

- Insert replaceable

- Smooth insert available for hygienic
areas

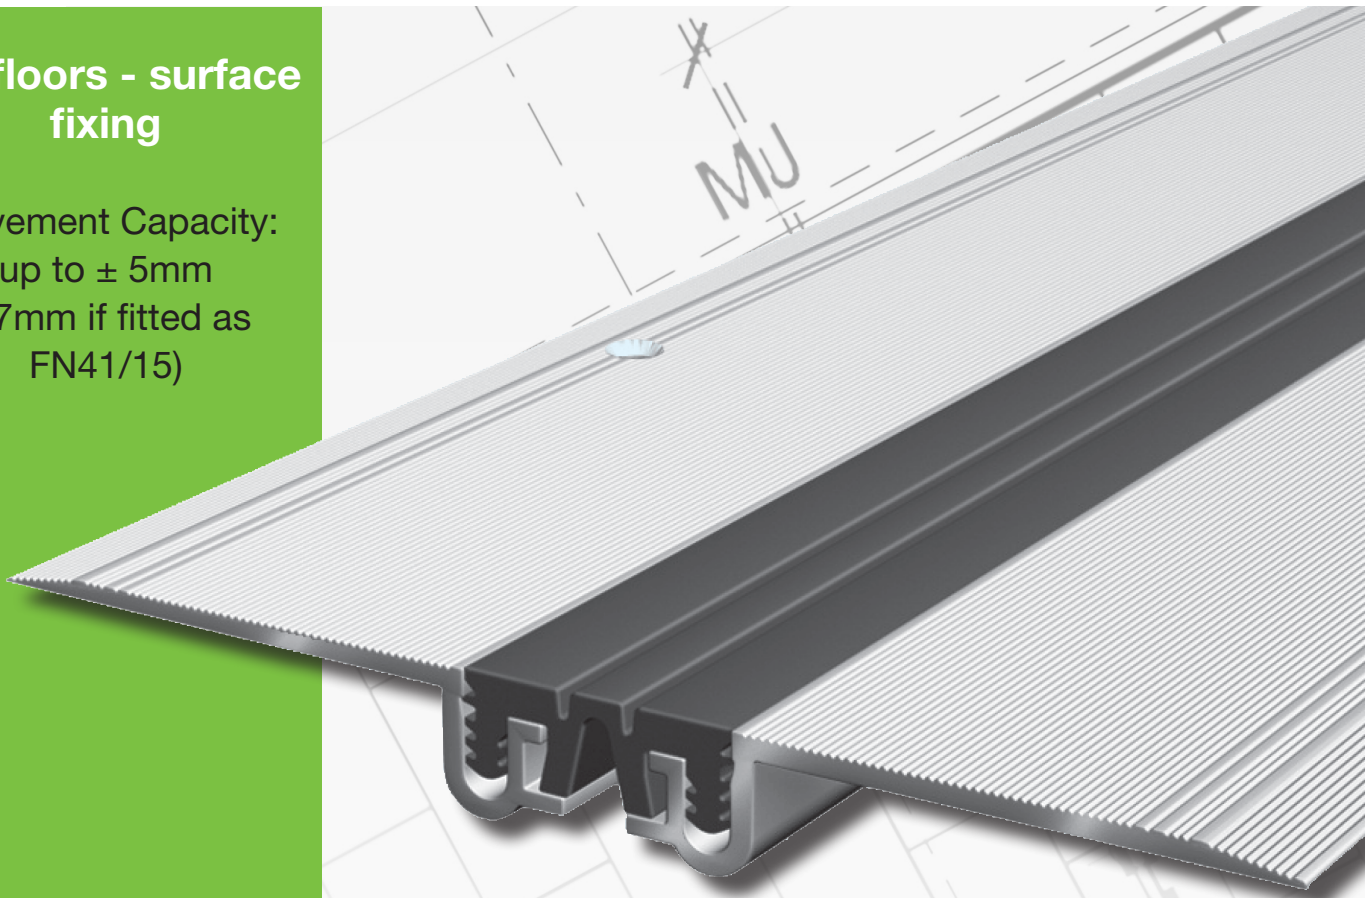

Profile	For PVC- coverings mm thickn.	For carpets mm thickn.	Joint width min. mm	Total movement mm	Visible width of Profile mm	Installation depth mm	Thickness of alu side plates mm	Load capacity
FN 35/15	-	-	35	10 +/-5	112	13	2	Pedestrians, light vehicles on request
FKN 35/15	3	-	35	10 +/-5	30	13	2	
FTN 35/15	-	5	35	10 +/-5	30	13	2	
FN 41/15	-	-	41	14 +/-7	118	13	2	

When specifying joint - please use full profile reference

compriband

Interspan Series FN 35/15

Product Information

Material

Cold drawn aluminium with a flexible high quality elastomeric corrugated movement insert

Typical Uses



- Offices and schools
- Floor refurbishment
- Raised access floors

Profile Lengths

Standard profile length = 4 metres
Shorter lengths are available on request

Profile Options

- Black, grey, brown and beige

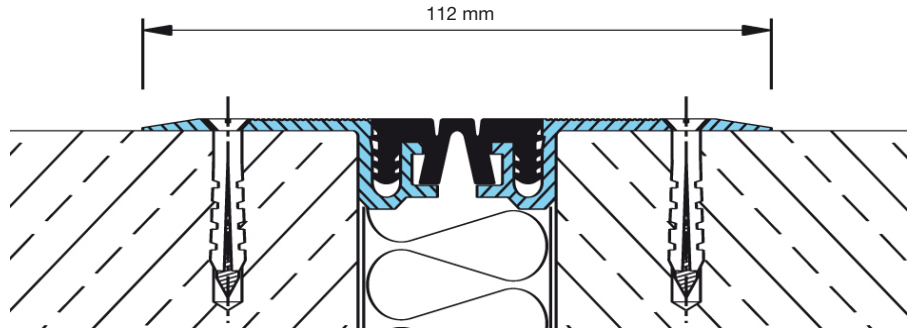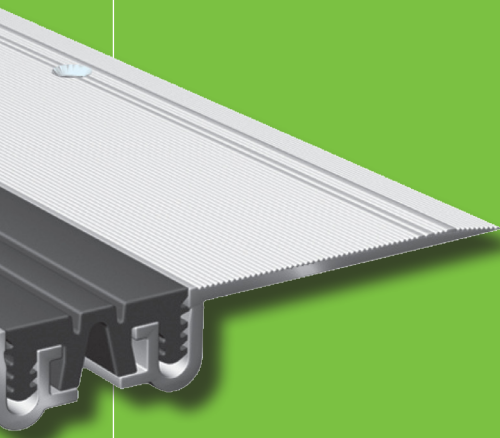

FN 35/15

General Information

Fixings

It may be advisable to bed the top plates on epoxy resin or similar to insure continuous contact with the surface that the joint is being fixed to. The joint must then mechanically fixed at 300mm symmetrical centres using suitable M8 countersunk fixing.

Maintenance

Periodic visual inspections should be carried out to ensure that no damage has occurred to the joints. Cleaning should be carried out using a mild detergent and water. If alternative cleaning chemicals or equipment are to be used, it is recommended that a suitability test should be carried out on a small section of the product in a non-prominent section of the joint.

For further advice or assistance, please contact Tremco illbruck on:

0191 419 0505

Whilst every care has been taken in the preparation of this information, no warranty is given or implied in connection with any recommendation or suggestion made herein or by our Representatives, Agents or Distributors. We reserve the right to modify specifications from time to time without prior notice. Users are advised to conduct their own tests in order to determine the suitability of the product for the intended purpose. All goods are supplied subject to standard Conditions of Sale which are available upon request.